




b) kV : 15.01 Tilt: 0.00 Take-off: 35.45 AmpT : 102.4
Detector Type: SUTW, Sapphire Resolution: 129.85 Lsec: 100

Element	Wt %	At %	K-Ratio	Z	A	F
O K	2.83	11.23	0.0065	1.2283	0.1860	1.0006
MgK	0.59	1.55	0.0025	1.1701	0.3566	1.0018
AlK	0.59	1.38	0.0032	1.1495	0.4775	1.0034
SiK	1.61	3.65	0.0116	1.2018	0.5958	1.0060
S K	7.20	14.27	0.0667	1.1725	0.7791	1.0148
AgL	49.14	28.96	0.4364	0.9292	0.9553	1.0004
K K	0.37	0.61	0.0038	1.1173	0.9081	1.0023
CaK	1.14	1.80	0.0106	1.1438	0.8103	1.0019
CuK	36.53	36.55	0.3669	1.0213	0.9833	1.0000
Total	100.00	100.00				

Element	Net Inte.	Bkgd Inte.	Inte. Error	P/B
O K	6.89	0.83	4.24	8.30
MgK	3.18	3.56	10.09	0.89
AlK	3.99	3.83	8.55	1.04
SiK	12.98	4.50	3.61	2.88
S K	61.28	5.20	1.38	11.78
AgL	142.57	5.61	0.87	25.41
K K	2.55	6.00	14.96	0.42
CaK	6.24	5.80	6.77	1.08
CuK	36.36	2.75	1.78	13.22

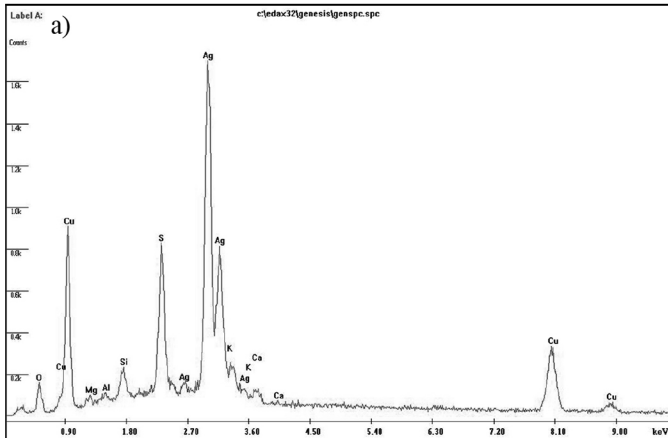